


CANVAS

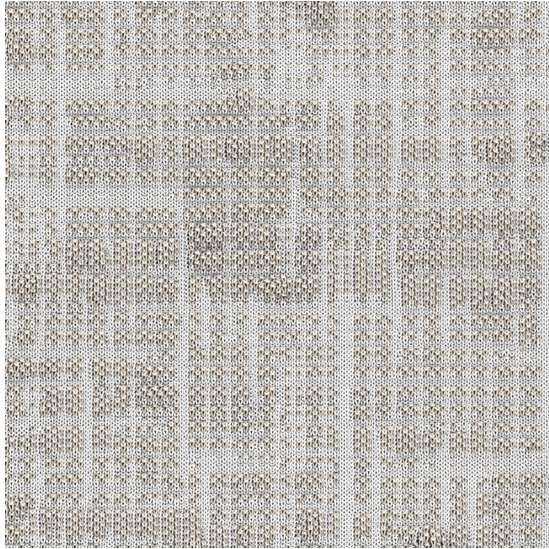

Ref n° F2534

Composition

80% polyester
20% recycled polyester

Width

170m ± 2cm

Weight

550 gr/m2 ± 5%

SPECIFICATIONS:

Abrasion resistance

60.000 ciclos EN ISO 12947-2

Abrasion resistance

(change of shade after 3000 cycles)

5 EN ISO 12947/4

y EN 14465:2003 (Annex A).

Pilling resistance

5 EN ISO 12947-2

Resistance to seam slippage (mm)

Warp: 1,5 mm

Weft: 2 mm

EN ISO 13936/2

Fastness to artificial light

7 EN ISO 105-B02 y

EN ISO 105 B02/A01

INFLAMMABILITY

EN1021 - Part 1

BS5852 - Part 1

CAL TB 117

EN1021 - Part 2*

BS5852 - Part 2*

CRIB 5*

CERTIFICATES




STANDARD
100



9001:2015

MAINTENANCE

Washing conditions



Dimensional change in domestic washing and drying (%)

Warp: -3%

Weft: 0%

EN ISO 3759 y

EN ISO 6330

*Flame retardant standards available upon request.
The information shown is for guidance purposes only and may be subject to change. For specific technical requirements, please consult our sales department.